



OFFICE SAFE

S1



S3



S2




- Body** : Designed to provide overall thickness of measuring 64mm. By using high density proofing material encased in steel to resist oxyacetylene and conventional tool attacks.
- Boltwork** : There are placed three boltworks on the front, top and bottom. A special design of resistance features to resist punch attacks on the moving bolts.
- Door** : Armoured door with lockcase embedded in the door structure and reinforced with solid heavy duty hinges to prevent drilling, oxyacetylene and mechanical tools attacks. The door slab is 75mm in thickness.
- Locking** : Standard locking system with three wheel combination lock, which is capable of providing 1,000,000 combinations and seven lever keylocks. Deadlock device system is incorporated to jam on the boltwork mechanism if forcible attacks are made on the door and locks.

S4



S5

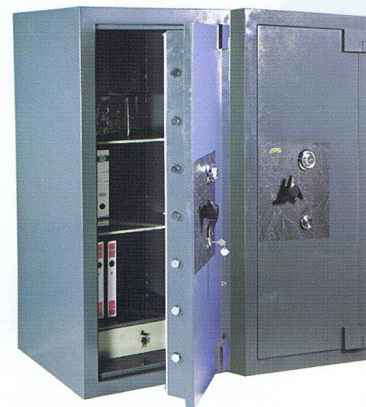

OFFICE SAFE

The APS office safe series are ideal for retail outlets, offices, factories and other institution that hold large amount of cash and valuables. Which requires high degree of protections. Its formidable barrier materials and superior product quality provide excellent protection against fire, and attacks using oxyacetylene torch, high speed drilling and hand tools.

OFFICE SAFE